


Portable air conditioner PC-MMA



- *Max. Cooling Capacity: 24,000 BTU/H
- *Dual Display: Touch Pad on top with LED display (7-segment) and additional display in the front
- *Auto-Swing available(VERTICAL blades)
- *Cooling, (Heating), Dehumidifying, Ventilating
- *Powerful dehumidify capacity:90~120L/Day
- *3-Step Fan Speed: High-Middle-Low
- *User-Friendly Program: Auto/ Lock/ Sleep
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating: No Draining and No Dripping
- *Similar design in metal case: PC-MMR

Standard features

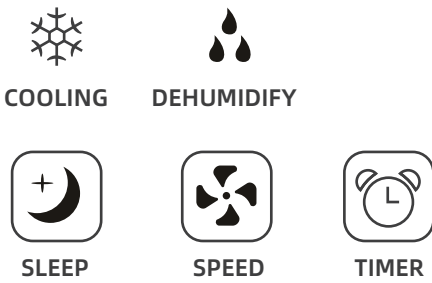

Optional features



Close look



Hose Connector: Connect Two Hoses for spot cooling

Model	PC53R-MMA	PC65R-MMA	PC70-MMA*	PC60R-MMA A+++
Cooling Capacity (BTU)	18000	22000	24000	20000
Cooling Capacity (W)	5300	6500	7000	6000
Cooling power consupction(W)	2030	2500	2690	1580
Heating Capacity (BTU)optional	18000	22000	24000	/
Heating Capacity (W)optional	5300	6500	7000	/
Heating power consupction(W)	1830	2300	2490	/
Air volume(m3/h)	950	950	1150	1150
Dehumidification (30°C, RH80%) (L/Day)	90L/Day	120L/Day	150L/Day	120L/Day
EER	2.6	2.6	2.5	4.1
Refrigerant Type	R290	R290	R410a	R290
Noise (dBA)	65	65	65	65
Unit Dimensions (mm)	W540*D695*H1140	W540*D695*H1140	W540*D695*H1140	W540*D695*H1140
Packing Dimensions (mm)	W590*D780*H1310	W590*D780*H1310	W590*D780*H1310	W590*D780*H1310
Container Loading (40'HQ)pcs	119	119	119	119
Net Weight (kg)	62	68	70	68
Gross Weight (kg)	71	73	75	73

*Optional Heating function: add a 4-way valve