

Test Report

Number: GZHH00289712

Sample Description:

One (1) piece of submitted sample said to be :
Item Name : **Luggage**




Tests conducted:

As requested by the applicant, refer to attached page(s) for details.

To be continued

Authorized by:
For Intertek Testing Services Shenzhen Ltd.
Guangzhou Branch, Hardlines

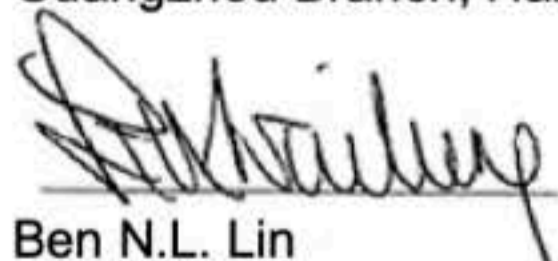
Ben N.L. Lin
General Manager



Test Report

Number: GZHH00289712


Conclusion:

| <u>Tested samples</u> | <u>Standard</u> | <u>Result</u> |
|-----------------------|--|---------------|
| Submitted sample | QB/T 2155-2010 Traveling Case and Trolley Bag - Clause 4.1 Specification - Clause 4.3 Appearance quality | Pass |

Note:

1. This English version of standard in this report is translated based on the original Chinese standard of QB/T 2155-2010. In the event of any doubts arising as to the contents, the original Chinese standard is to be the final authority.

Authorized by:
For Intertek Testing Services Shenzhen Ltd.
Guangzhou Branch, Hardlines

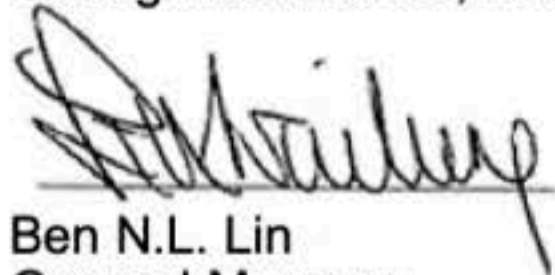

Ben N.L. Lin
General Manager



Test Report

Number: GZHH00289712

Tests Conducted

1 Performance Tests on Traveling Case and Trolley Bag

As per the client's requirement, with reference to QB/T 2155-2010 Traveling case and trolley bag, the submitted sample was subjected to the following tests.

Number of samples tested: One (1) piece

Overall dimensions: 398 mm W x 233 mm D x 578 mm ~1020 mm H

Weight: 2.6 kg

Test level: Qualified product

Initial inspection: No damage was found.

Executive summary:

| Clause | Test Method/Requirement | Result | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|---|--|-----------|------------------------|-----------|-----------------|----|----------------|----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|
| 4.1 | Specification | -- | | | | | | | | | | | | | | | | | | | | | | |
| 4.1.1 | Traveling case and trolley bag: <table border="1"> <thead> <tr> <th>Specification (Length)</th> <th>Tolerance</th> <th>Specification (Length)</th> <th>Tolerance</th> </tr> </thead> <tbody> <tr> <td>≤455 (18 inch)</td> <td rowspan="10">±5</td> <td>660 (26 inch)</td> <td rowspan="10">±6</td> </tr> <tr> <td>480 (19 inch)</td> <td>685 (27 inch)</td> </tr> <tr> <td>505 (20 inch)</td> <td>710 (28 inch)</td> </tr> <tr> <td>535 (21 inch)</td> <td>735 (29 inch)</td> </tr> <tr> <td>560 (22 inch)</td> <td>760 (30 inch)</td> </tr> <tr> <td>585 (23 inch)</td> <td>785 (31 inch)</td> </tr> <tr> <td>610 (24 inch)</td> <td>810 (32 inch)</td> </tr> <tr> <td>635 (25 inch)</td> <td>≥835 (33 inch)</td> </tr> </tbody> </table> Note: the export product shall be implemented based on the signed contract. | Specification (Length) | Tolerance | Specification (Length) | Tolerance | ≤455 (18 inch) | ±5 | 660 (26 inch) | ±6 | 480 (19 inch) | 685 (27 inch) | 505 (20 inch) | 710 (28 inch) | 535 (21 inch) | 735 (29 inch) | 560 (22 inch) | 760 (30 inch) | 585 (23 inch) | 785 (31 inch) | 610 (24 inch) | 810 (32 inch) | 635 (25 inch) | ≥835 (33 inch) | Record : 482 mm |
| Specification (Length) | Tolerance | Specification (Length) | Tolerance | | | | | | | | | | | | | | | | | | | | | |
| ≤455 (18 inch) | ±5 | 660 (26 inch) | ±6 | | | | | | | | | | | | | | | | | | | | | |
| 480 (19 inch) | | 685 (27 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 505 (20 inch) | | 710 (28 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 535 (21 inch) | | 735 (29 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 560 (22 inch) | | 760 (30 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 585 (23 inch) | | 785 (31 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 610 (24 inch) | | 810 (32 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 635 (25 inch) | | ≥835 (33 inch) | | | | | | | | | | | | | | | | | | | | | | |
| 4.1.2 | | Travelling case and trolley bag For the travelling case and trolley bag fitted with extendable puller and rollers, the dimensions shall be labelled as designed and the tolerance of the actual dimensions shall be within ±5 of that labelled. | | Not applicable | | | | | | | | | | | | | | | | | | | | |
| 4.3 | | Appearance quality | | -- | | | | | | | | | | | | | | | | | | | | |
| 4.3.1 | The main body of the case: The product shall be structurally integral and uniform with straight and smooth outlining. And the product shall be stable without rocking or incline when standing. | Pass | | | | | | | | | | | | | | | | | | | | | | |
| 4.3.2 | Shell quality | -- | | | | | | | | | | | | | | | | | | | | | | |



Test Report

Number: GZHH00289712

Tests Conducted

| Clause | Test Method/Requirement | Result |
|---------|---|----------------|
| 4.3.2.1 | Travelling case and trolley bag with soft upper material: Shell: The shell materials shall be neat and in harmonious colours without stains or obvious crease or pleat at the seams. Leather: no obvious defects Leatheroid and synthetic leather: shall be smooth without obvious blotch, imprint Fabrics: no treads' breaking, skipping, cracking or other flaws in the main parts; 2 slight flaws allowable for the other parts. | Not applicable |
| 4.3.2.2 | Travelling case and trolley bag with hard upper material: The shell materials shall be neat without any surface defects such as stains, unevenness, cracks, deformation, scald or scratches. | Pass |
| 4.3.3 | Opening: The unit shall be firmly closed with no excess clearance at the opening. The opening and the side panel of the unit shall be fitted tightly. The aluminium structure shall have no scratches, burrs, or striking marks and its protection coating shall be treated in uniform colour. | Pass |
| 4.3.4 | Lining: The lining shall be sewn and adhered securely to the product in good workmanship. And the lining fabric shall present no tread breakage, yarn skipping, cracking or other surface defects. | Pass |
| 4.3.5 | Stitching: Neat stitching is required, and no abnormality about stitching such as skipping, breakage, slippage or etc shall appear on the main part of the product. For the other parts, 2 stitching flaws are allowable, but no more than 2 stitches for each flaw. | Pass |
| 4.3.6 | Zipper: Zipper shall be sewn in a good manner and perform smoothly and normally. The distance in between the zipper and the side shall not deflect more than 2mm. | Pass |
| 4.3.7 | Accessories (handle, extendable puller, locking mechanism, hook, ring, decorative parts) Shall be smoothly finished and free of burrs. The plated accessories shall be glossy and uniform in colour, free of uncovered surface, rust, blisters, peeling of plating, scratches. And the painted surface shall be well treated with uniform colour without uncovered surface, protruding drop of coating, crinkle or lifting of coating. | Pass |

End of report

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. This report shall not be reproduced unless with prior written approval from Intertek Testing Services Shenzhen Limited, Guangzhou Branch.

