

FCC Part 15B Test Report

Report No. : TB-FCC165982
Applicant : SHENZHEN FLYCAT ELECTRICAL CO., LTD.
Equipment Under Test (EUT)
EUT Name : ORAL IRRIGATOR
Model No. : FC188
Serial Model No. : Please see the general description of EUT
Receipt Date : 2019-05-08
Test Date : 2019-05-09 to 2019-05-13
Issue Date : 2019-05-13
Standards : FCC Part 15:2018 Subpart B
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above

The EUT technically complies with the FCC requirements

Test/Witness Engineer :

Rebecca

Engineer Supervisor :

Ivan

Engineer Manager :

Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION.....	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing The Configuration of System Tested.....	5
1.4 Description of Support Units	5
1.5 Description of Test Mode.....	5
1.6 Test standards.....	5
1.7 Test Facility.....	6
1.8 Measurement Uncertainty	6
2. TEST SUMMARY	7
3. TEST EQUIPMENT USED	7
4. LABEL REQUIREMENTS&STATEMENT REQUIREMENTS	8
5. CONDUCTED EMISSION TEST	9
5.1 Test Standard and Limit.....	9
5.2 Test Setup.....	9
5.3 Test Procedure.....	10
5.4 Test Data.....	10
6. RADIATED EMISSION TEST	11
6.1 Test Standard and Limit.....	11
6.2 Test Setup.....	11
6.3 Test Procedure.....	12
6.4 Test Data.....	12
7. PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	13
8. PHOTOGRAPHS - TEST SETUP	16
ATTACHMENT A--CONDUCTED EMISSION DATA.....	17
ATTACHMENT B--RADIATED EMISSION TEST DATA	19

Revision History

Report No.	Version	Description	Issued Date
TB-FCC165982	Rev.01	Initial issue of report	2019-05-13

1. General Information


1.1 Client Information

Applicant	:	SHENZHEN FLYCAT ELECTRICAL CO., LTD.
Address	:	No.4 Bldg, Xianyuxing Industrial Park, Gonghe Community, Shajing, Bao'an, Shenzhen, China
Manufacturer	:	SHENZHEN FLYCAT ELECTRICAL CO., LTD.
Address	:	No.4 Bldg, Xianyuxing Industrial Park, Gonghe Community, Shajing, Bao'an, Shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	ORAL IRRIGATOR
Model(s)	:	FC188, FC188W, HOC300, HC038, SF08, SF09, IP-1512, G188, BLS-2800, FC188-PK, FC188-WH, GB1900, F76-0004, GL-555.
Model Difference	:	All these models are identical in the same PCB layout and electrical circuit, the only difference is model name for commercial. therefore, Testing was performed with FC188 only.
Power Supply	:	100-240V AC, 50/60Hz
Equipment	:	<input type="checkbox"/> Class A <input checked="" type="checkbox"/> Class B
<p>Class A Equipment: the Equipment is not intended primarily for use in a residential environment.</p> <p>Class B Equipment: the Equipment is intended primarily for use in a residential environment.</p>		

1.3 Block Diagram Showing The Configuration of System Tested

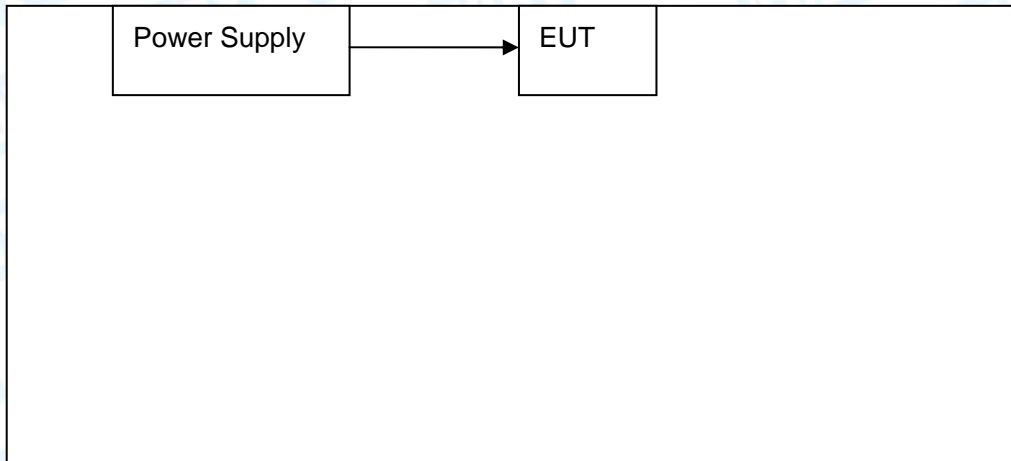

1.4 Description of Support Units

The EUT has been tested as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follows was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging Mode+ Working Mode
For Radiated Test	
Final Test Mode	Description
Mode 1	Charging Mode+ Working Mode

1.6 Test standards

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.107, 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.7 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

1.8 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Parameters	Expanded Uncertainty (U_{Lab})	Expanded Uncertainty (U_{Cispr})
Conducted Emission	Level Accuracy: 9kHz~150kHz	± 3.42 dB	± 4.0 dB
	150kHz to 30MHz	± 3.42 dB	± 3.6 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB	N/A
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.40 dB	± 5.2 dB

2. Test Summary

Test Items	Test Requirement	Test Method	Result
Conducted Emission	FCC Part 15:2018 Subpart B	ANSI C63.4	Pass
Radiated Emission	FCC Part 15:2018 Subpart B	ANSI C63.4	Pass

Note: N/A is an abbreviation for Not Applicable.

3. Test Equipment Used

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 18, 2018	Jul. 17, 2019
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 18, 2018	Jul. 17, 2019
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 18, 2018	Jul. 17, 2019
LISN	Rohde & Schwarz	ENV216	101131	Jul. 18, 2018	Jul. 17, 2019
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 18, 2018	Jul. 17, 2019
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Jul. 18, 2018	Jul. 17, 2019
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Jan. 27, 2019	Jan. 26, 2020
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Jan. 27, 2019	Jan. 26, 2020
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 03, 2019	Mar. 02, 2020
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 03, 2019	Mar. 02, 2020
Pre-amplifier	HP	11909A	185903	Mar. 04, 2019	Mar. 03, 2020
Pre-amplifier	HP	8449B	3008A00849	Mar. 03, 2019	Mar. 02, 2020
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 03, 2019	Mar. 02, 2020
Signal Generator	Rohde & Schwarz	SML03	IKW682-054	Mar. 03, 2019	Mar. 02, 2020
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

4. Label Requirements&Statement Requirements

 Class B Label Requirements

Class B digital device subject to certification by the FCC shall carry a warning label which includes the following statement:

***** WARNING *****

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

 Class A**Statement Requirements**

The operator's manual for a Class A digital device shall contain the following statements or their equivalent:

***** WARNING *****

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment This equipment generates, uses, and can radiate radio frequency energy and, if not installed and uses in accordance with the instruction manual, may cause harmful interference to radio communications Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

If the EUT was tested with special shielded cables the operator's manual for such product shall also contain the following statements or their equivalent:

Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15 B: 2018

5.1.2. Test Limit

Conducted Emission Test Limit (Class A)


Frequency (MHz)	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	79	66
0.50~30	73	60

Conducted Emission Test Limit (Class B)

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
0.15~0.5	66 ~ 56 *	56 ~ 46 *
0.50~5	56	46
5~30	60	50

*decreasing linearly with logarithm of the frequency

5.2 Test Setup

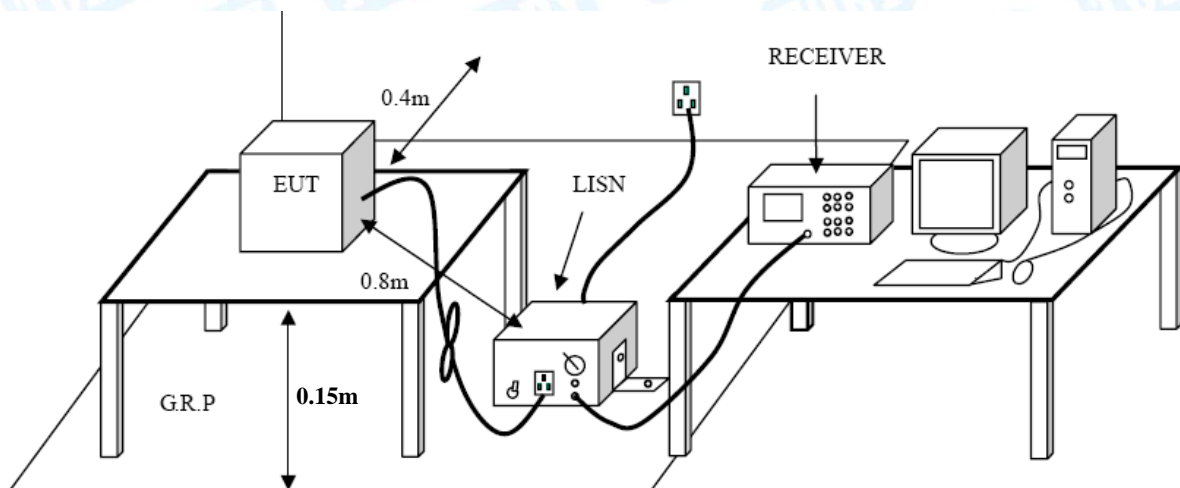

5.3 Test Procedure

The EUT was placed 0.15 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

The cables shall be insulated (by up to 15 cm) from the horizontal ground reference plane, and shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Test Data

Please refer to the Attachment A.

6. Radiated Emission Test

6.1 Test Standard and Limit

6.1.1 Test Standard


FCC Part 15 B: 2018

6.1.2 Test Limit

Radiated Emission Test Limit (Class A)	
Frequency MHz	Field Strengths Limits dB(μ V/m)
30 ~ 88	49.0
88 ~ 216	53.5
216 ~ 960	56.4
960 ~ 1000	59.5
Radiated Emission Test Limit (Class B)	
Frequency MHz	Field Strengths Limits dB(μ V/m)
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
960 ~ 1000	54.0

* The lower limit shall apply at the transition frequency.
* The test distance is 3m.

6.2 Test Setup

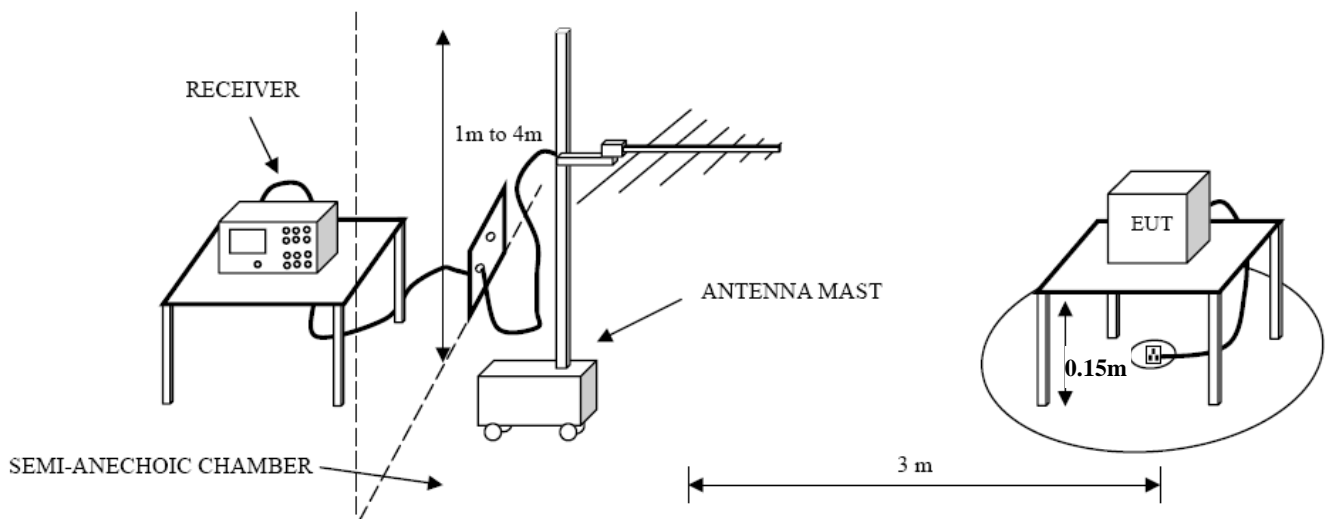

6.3 Test Procedure

The EUT was placed on the top of a rotating table which is 0.15 meters above the ground. EUT is set 3.0 meters away from the receiving antenna that mounted on a antenna tower. The table was rotated 360 degrees to determine the position of the highest radiation, the antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30MHz to 1000MHz. If the Peak Mode measured value compliance with and lower than quasi-peak mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

6.4 Test Data

Please refer to the Attachment B.

7. Photographs - Constructional Details

Photo 1 Appearance of EUT



Photo 2 Appearance of EUT



Photo 3 Appearance of EUT



Photo 4 Internal of EUT

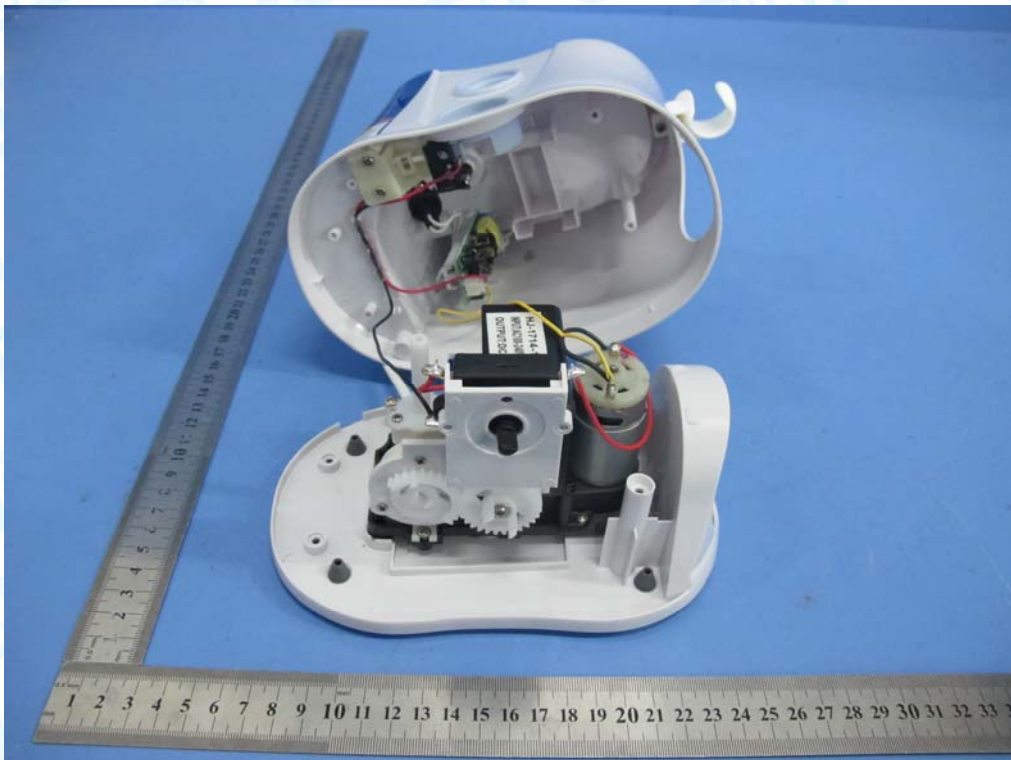


Photo 5 Appearance of PCB


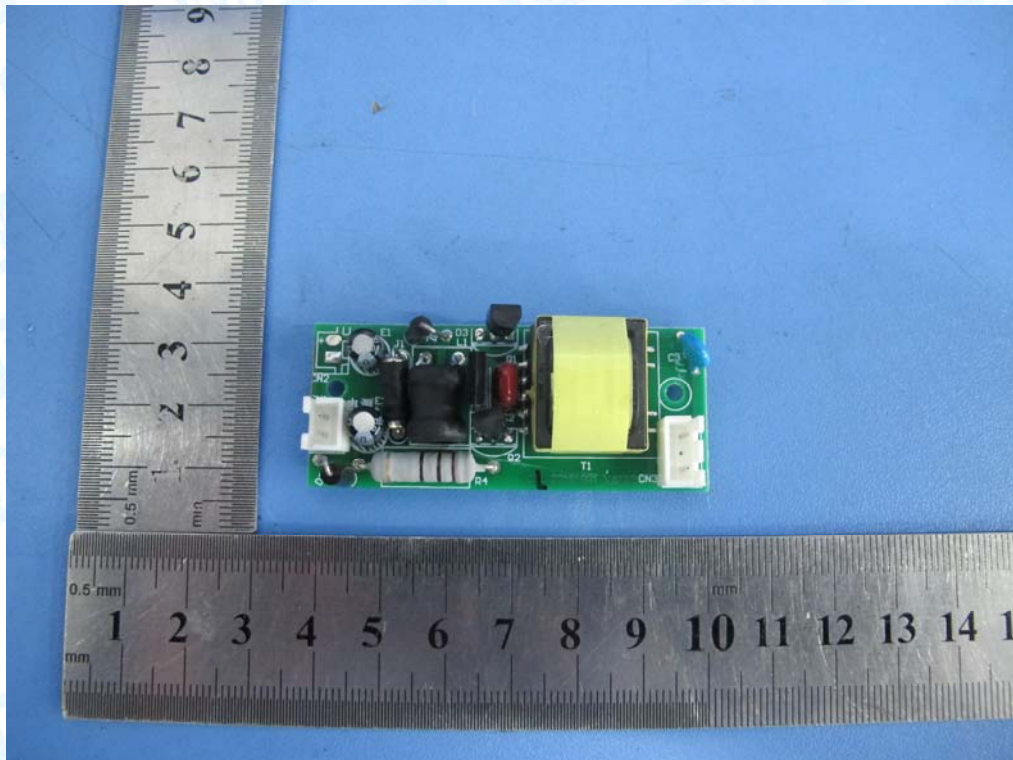


Photo 6 Appearance of PCB




8. Photographs - Test Setup

Conducted Emission Test Setup

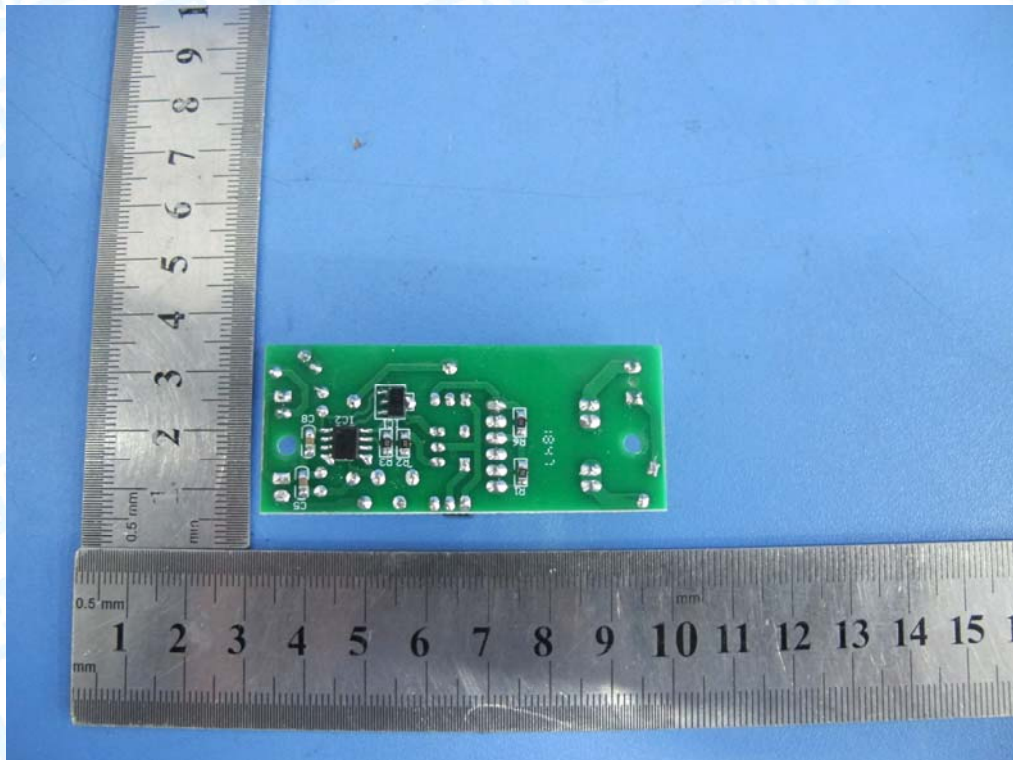


Radiated Emission Test Setup

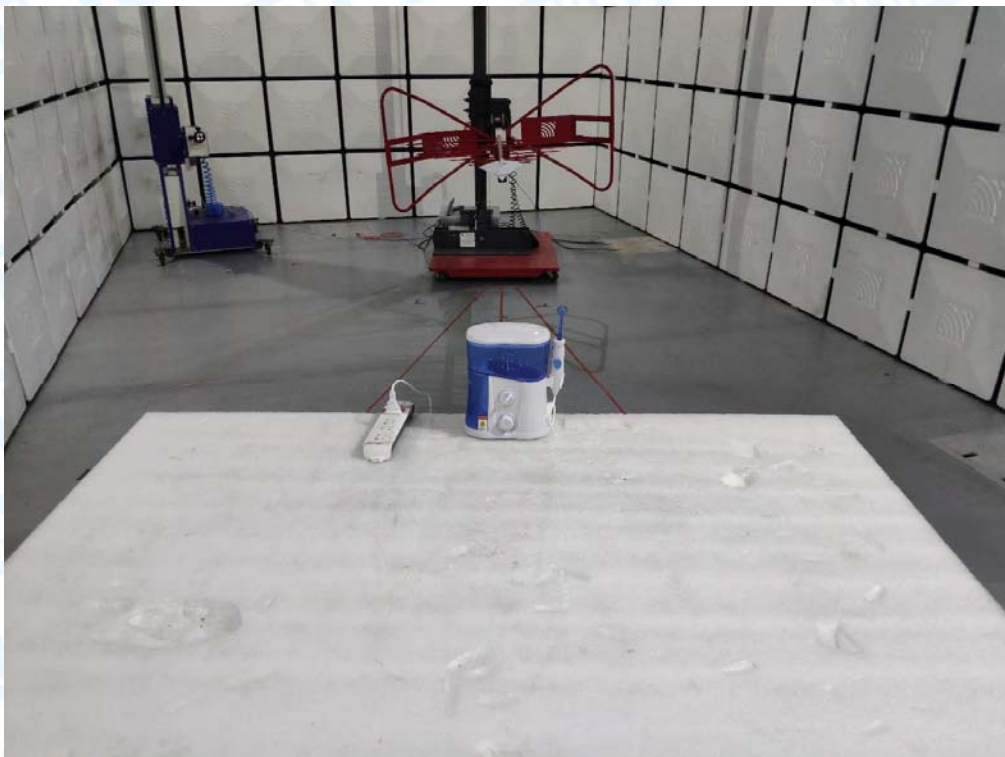

Attachment A--Conducted Emission Data


Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010 hPa		
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	N/A		

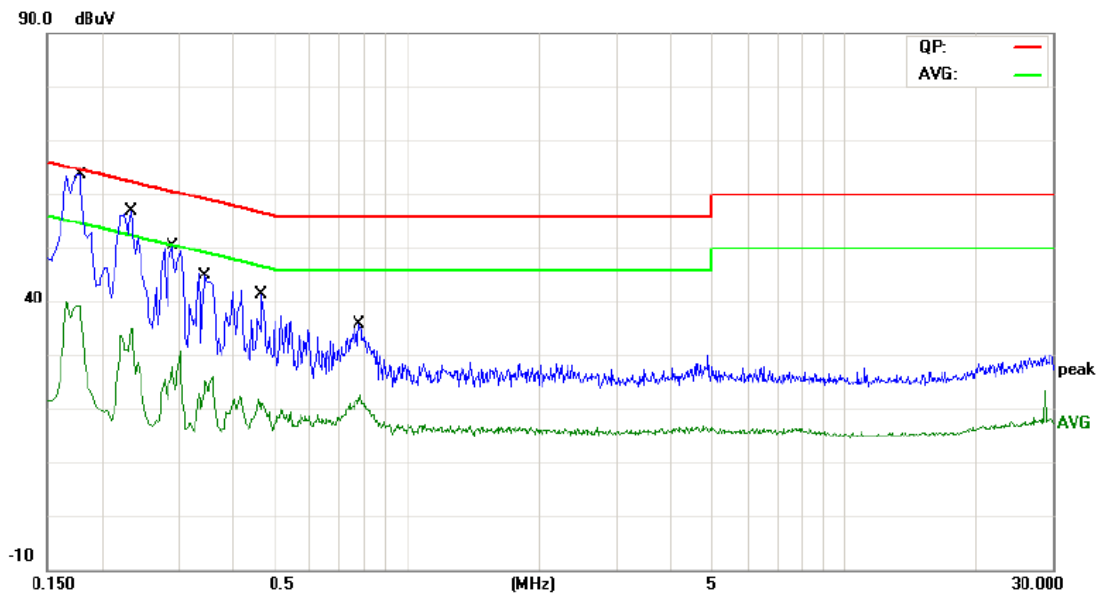

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1780	50.17	9.58	59.75	64.57	-4.82	QP
2		0.1780	29.58	9.58	39.16	54.57	-15.41	AVG
3		0.2340	43.29	9.58	52.87	62.30	-9.43	QP
4		0.2340	23.83	9.58	33.41	52.30	-18.89	AVG
5		0.2900	36.61	9.59	46.20	60.52	-14.32	QP
6		0.2900	18.69	9.59	28.28	50.52	-22.24	AVG
7		0.3460	30.79	9.59	40.38	59.06	-18.68	QP
8		0.3460	14.07	9.59	23.66	49.06	-25.40	AVG
9		0.4660	22.29	9.60	31.89	56.58	-24.69	QP
10		0.4660	10.05	9.60	19.65	46.58	-26.93	AVG
11		0.7780	20.75	9.61	30.36	56.00	-25.64	QP
12		0.7780	11.86	9.61	21.47	46.00	-24.53	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010 hPa		
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	N/A		

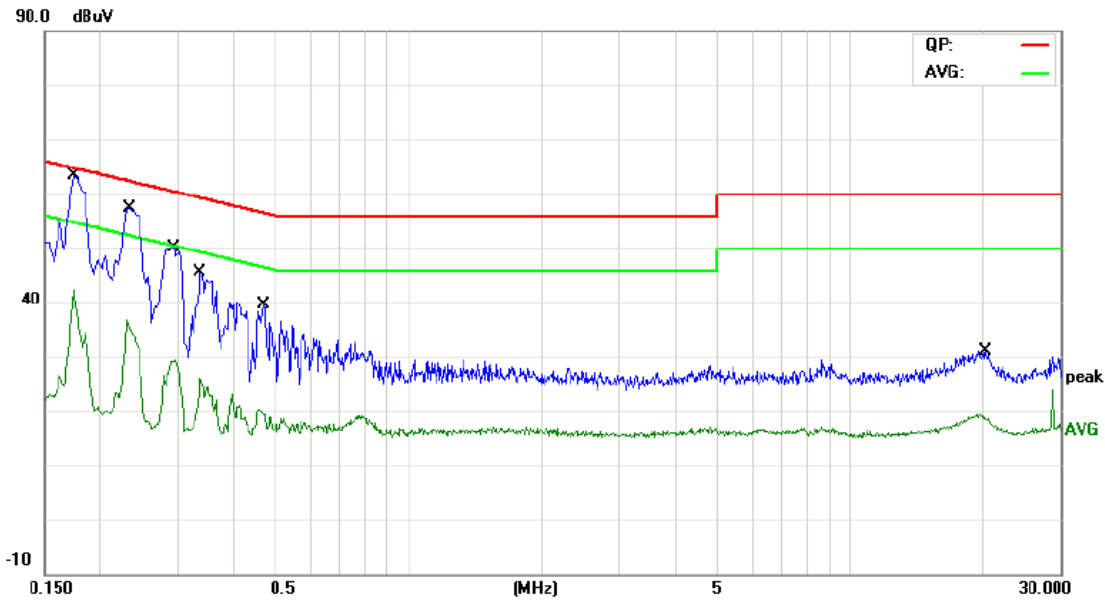


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1740	50.67	9.64	60.31	64.76	-4.45	QP
2		0.1740	30.98	9.64	40.62	54.76	-14.14	AVG
3		0.2340	43.03	9.62	52.65	62.30	-9.65	QP
4		0.2340	23.75	9.62	33.37	52.30	-18.93	AVG
5		0.2940	36.13	9.57	45.70	60.41	-14.71	QP
6		0.2940	17.22	9.57	26.79	50.41	-23.62	AVG
7		0.3392	30.92	9.57	40.49	59.22	-18.73	QP
8		0.3392	12.69	9.57	22.26	49.22	-26.96	AVG
9		0.4700	21.63	9.58	31.21	56.51	-25.30	QP
10		0.4700	8.21	9.58	17.79	46.51	-28.72	AVG
11		20.3420	12.91	10.65	23.56	60.00	-36.44	QP
12		20.3420	7.23	10.65	17.88	50.00	-32.12	AVG


Emission Level= Read Level+ Correct Factor

Attachment B--Radiated Emission Test Data

----Below 1G

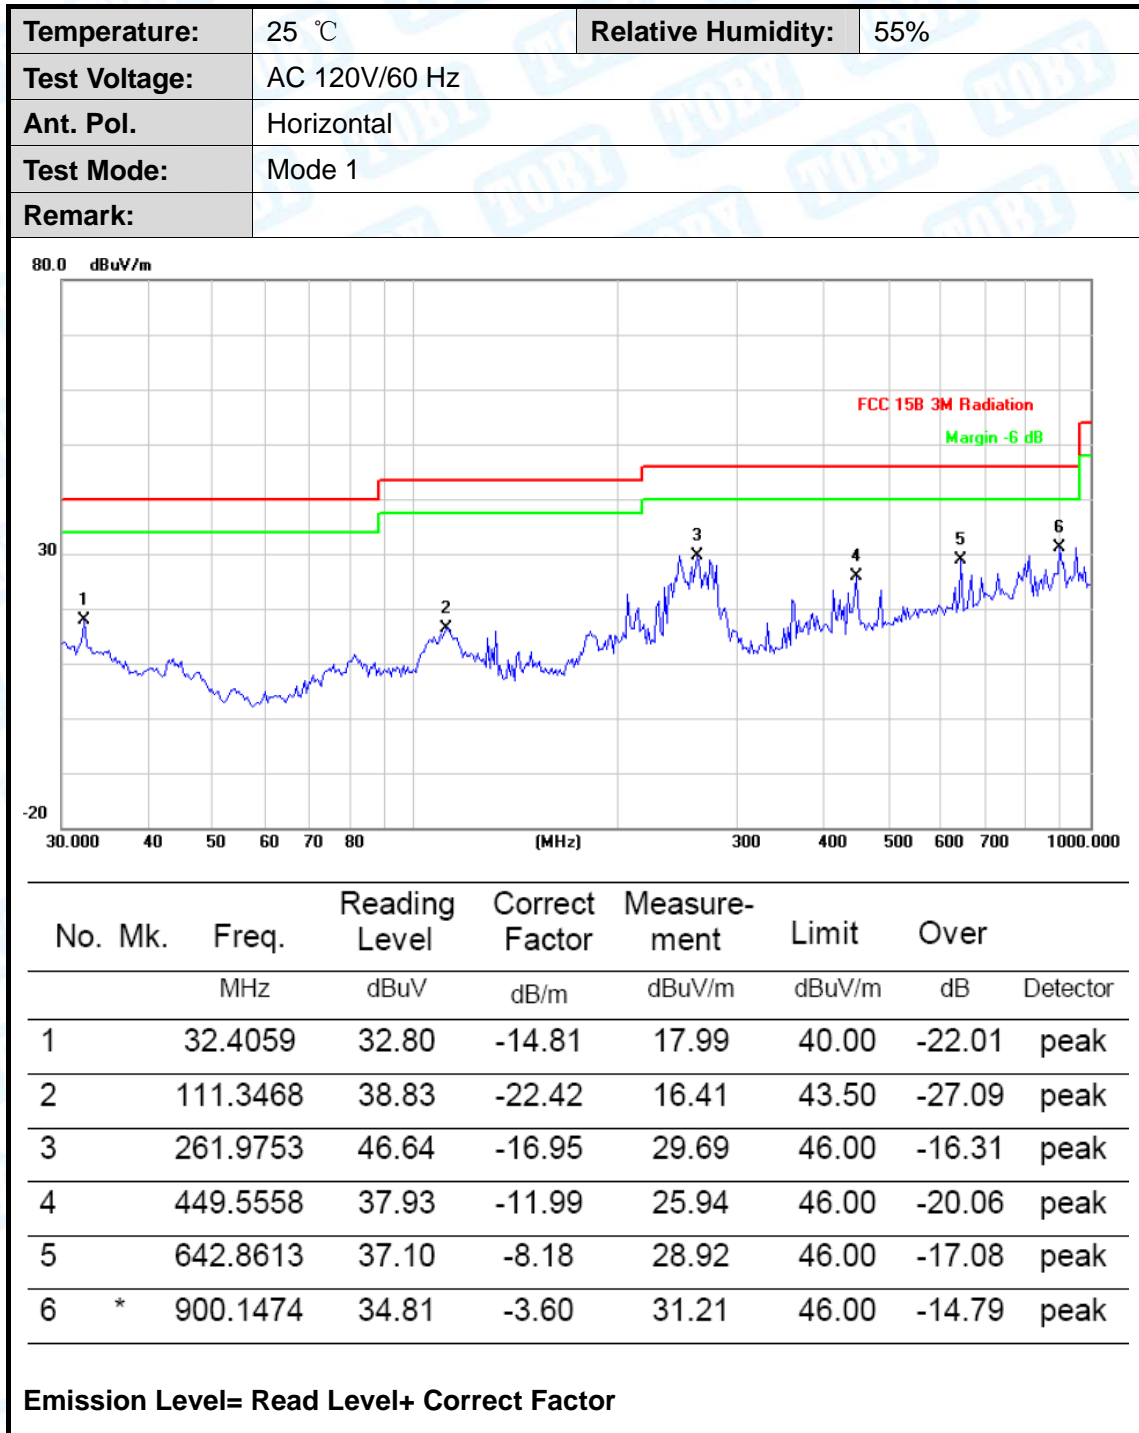

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 1		
Remark:			

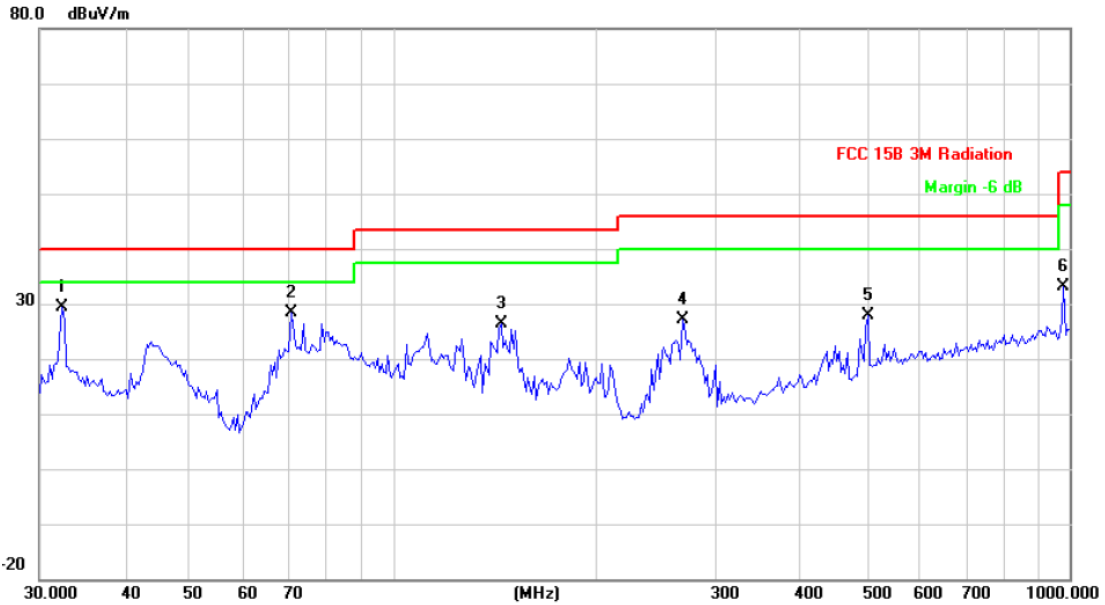

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	32.4059	44.09	-14.81	29.28	40.00	-10.72	peak
2		70.5836	51.86	-23.46	28.40	40.00	-11.60	peak
3		144.3348	48.43	-22.03	26.40	43.50	-17.10	peak
4		267.5455	44.00	-16.84	27.16	46.00	-18.84	peak
5		502.9395	38.47	-10.52	27.95	46.00	-18.05	peak
6		979.1804	36.57	-3.33	33.24	54.00	-20.76	peak

Emission Level= Read Level+ Correct Factor

-----END OF REPORT-----