

Test Report issued under the responsibility of:



**TEST REPORT**  
**IEC 60598-2-1**  
**Luminaires**  
**Part 2: Particular requirements**  
**Section 1: Fixed general purpose luminaires**

**Report Number..... :** 4916356.50  
**Date of issue..... :** 2024-05-15  
**Total number of pages .....** : 42 pages

**Name of Testing Laboratory** : DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou  
**preparing the Report .....** : Branch

**Applicant's name .....** : Tangla Lighting & Living Limited  
**Address.....** : 10F Mass Mutual Tower, 33 Lockhart Road, Hong Kong

**Test specification:**

**Standard .....** : IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020  
**Test procedure .....** : Type test  
**Non-standard test method .....** : N/A

**TRF template used.....** : IECEE OD-2020-F1:2021, Ed.1.4

**Test Report Form No. ....** : IEC60598\_2\_11

**Test Report Form(s) Originator ....** : Intertek Semko AB

**Master TRF .....** : Dated 2022-08-26



**Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**

The test results presented in this report relate only to the object tested.  
This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

<b>Test item description</b> .....	Fixed general purpose luminaires	
<b>Trade Mark(s)</b> .....	Tangla	
<b>Manufacturer</b> .....	Same as applicant	
<b>Model/Type reference</b> .....	TLP-9001-40-xx Note: "xx" denotes lamp shape outlook color. "01" is white. "02" is red.	
<b>Ratings</b> .....	230 Vac, 50 Hz, IP44, Class II, Max. LED 10 W, E27, ta 45 °C	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>Testing Laboratory:</b>	DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou Branch
<b>Testing location/ address</b> .....		Block 5, No. 3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
<b>Tested by (name, function, signature)</b> .....		Fair Deng (Project handler) 
<b>Approved by (name, function, signature)</b> ...		Magic Tong (Reviewer) 
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	--
<b>Testing location/ address</b> .....		--
<b>Tested by (name, function, signature)</b> .....		--
<b>Approved by (name, function, signature)</b> ...		--
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	--
<b>Testing location/ address</b> .....		--
<b>Tested by (name + signature)</b> .....		--
<b>Witnessed by (name, function, signature) .:</b>		--
<b>Approved by (name, function, signature)</b> ...		--
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	--
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	--
<b>Testing location/ address</b> .....		--
<b>Tested by (name, function, signature)</b> .....		--
<b>Witnessed by (name, function, signature) .:</b>		--
<b>Approved by (name, function, signature)</b> ...		--
<b>Supervised by (name, function, signature) :</b>		--

<b>List of Attachments (including a total number of pages in each attachment):</b> Attachment 1: EU group differences and national differences (2 pages) Attachment 2: Product photos (5 pages)	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b>  TLP-9001-40-01 was subjected to full test. Both models were subjected to construction check.	<b>Testing location:</b>  DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch Block 5, No. 3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
<b>Summary of compliance with National Differences (List of countries addressed):</b>  <input checked="" type="checkbox"/> EU group differences	
<b>Use of uncertainty of measurement for decisions on conformity (decision rule) :</b>  <input checked="" type="checkbox"/> No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").  <input type="checkbox"/> Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)	
<b>Information on uncertainty of measurement:</b> The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE. IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.  Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.	

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Representative****TLP-9001-40-01**

E27, max. LED 10 W

230V~ 50Hz

ta: 45°C

**Tangla Lighting and Living Limited**

10F Mass Mutual Tower

33 Lockhart Road

Hong Kong

[www.tanglalighting-living.com](http://www.tanglalighting-living.com)**IP44**  
MADE IN CHINA

Location: affixed on position where visible during installation, normal use and replacing lamp.

**Remark on above marking:**

1. The height of graphical symbols are more than 5 mm;
2. The height of letters and numerals are more than 2 mm;
3. The height of rubbish bin symbol is more than 7 mm.

<b>Test item particulars.....:</b>	
<b>Classification of installation and use.....:</b> Class II fixed luminaires (Revised on 2024-06-20)	
<b>Supply Connection .....</b> Terminal block	
<b>Possible test case verdicts:</b> - test case does not apply to the test object.....: N/A - test object does meet the requirement.....: P (Pass) - test object does not meet the requirement.....: F (Fail)	
<b>Testing.....:</b> <b>Date of receipt of test item .....</b> 2024-03-04 to 2024-03-18 <b>Date (s) of performance of tests .....</b> 2024-03-04 to 2024-05-15	
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.  <b>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</b>  This report will not be used for social proof function in China market.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC60598-2-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided ..... :	<input type="checkbox"/> <b>Yes</b> <input checked="" type="checkbox"/> <b>Not applicable</b>
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies) .....</b> : Same as applicant.          	

**General product information and other remarks:**

The products in this report were tested/evaluated and complied with following standards:

- IEC 60598-2-1: 2020 used in conjunction with IEC 60598-1: 2020
- EN IEC 60598-2-1: 2021 used in conjunction with EN IEC 60598-1: 2021 + A11: 2022
- EN 62493: 2015

The products covered in this report are ceiling mounted luminaires equipped with E27 lamp holder. Both models have similar mechanical and electrical construction except the outlook color. Used LED lamps on these two models shall be able to comply with IP44 requirement. (Revised on 2024-06-20)

The products do not contain any active electronic parts, so they are considered to comply with EN 62493: 2015 without any testing.

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.4 (0)</b>	<b>GENERAL TEST REQUIREMENTS</b>		
1.4 (0.3)	More sections applicable..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	—
1.4 (0.5)	Components	(see Annex 1)	—
<b>1.4 (0.7)</b>	<b>Information for luminaire design in light sources standards</b>		—
1.4 (0.7.2)	Light source safety standard .....	EN 62560	—
	Luminaire design in the light source safety standard		P
<b>1.5 (2)</b>	<b>CLASSIFICATION OF LUMINAIRES</b>		
1.5 (2.2)	Type of protection .....	Class II	P
1.5 (2.3)	Degree of protection..... :	IP44	—
1.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
1.5 (2.5)	Luminaire for normal use .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
<b>1.6 (3)</b>	<b>MARKING</b>		
1.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
1.6 (3.3)	Additional information		P
	Language of instructions		P
1.6 (3.3.1)	Combination luminaires		N/A
1.6 (3.3.2)	Nominal frequency in Hz		P
1.6 (3.3.3)	Operating temperature		N/A
1.6 (3.3.5)	Wiring diagram		N/A
1.6 (3.3.6)	Special conditions		N/A
1.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
1.6 (3.3.8)	Limitation for semi-luminaires		N/A
1.6 (3.3.9)	Power factor and supply current		N/A
1.6 (3.3.10)	Suitability for use indoors		N/A
1.6 (3.3.11)	Luminaires with remote control		N/A
1.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
1.6 (3.3.13)	Specifications of protective shields		N/A
1.6 (3.3.14)	Symbol for nature of supply	~	P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6 (3.3.15)	Rated current of socket outlet		N/A
1.6 (3.3.16)	Rough service luminaire		N/A
1.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		N/A
1.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
1.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
1.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
1.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided		N/A
1.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
1.6 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
1.6 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
1.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
1.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0,3 m, information provided		N/A
1.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P

<b>1.7 (4)</b>	<b>CONSTRUCTION</b>		
1.7 (4.2)	Components replaceable without difficulty		P
1.7 (4.3)	Wireways smooth and free from sharp edges		P
<b>1.7 (4.4)</b>	<b>Lamp holders</b>		<b>P</b>
1.7 (4.4.1)	Integral lamp holder		N/A
1.7 (4.4.2)	Wiring connection		N/A
1.7 (4.4.3)	Lamp holder for end-to-end mounting		N/A
1.7 (4.4.4)	Positioning		P
	- pressure test (N) .....		—
	After test the lamp holder comply with relevant standard sheets and show no damage		N/A



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After test on single-capped lamp holder the lamp holder has not moved from its position and show no permanent deformation		N/A
	- bending test (N) ..... :	E27: 2,0 Nm	—
	After test the lamp holder has not moved from its position and show no permanent deformation		P
1.7 (4.4.5)	Peak pulse voltage		N/A
1.7 (4.4.6)	Centre contact		N/A
1.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
1.7 (4.4.8)	Lamp connectors		N/A
1.7 (4.4.9)	Caps and bases correctly used		N/A
1.7 (4.4.10)	Light source for lamp holder or connection according IEC 60061 not connected another way		P
<b>1.7 (4.5)</b>	<b>Starter holders</b>		<b>N/A</b>
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
<b>1.7 (4.6)</b>	<b>Terminal blocks</b>		<b>N/A</b>
	Tails		N/A
	Unsecured blocks		N/A
<b>1.7 (4.7)</b>	<b>Terminals and supply connections</b>		<b>P</b>
1.7 (4.7.1)	Contact to metal parts		P
1.7 (4.7.2)	Test 8 mm live conductor		P
	Test 8 mm earth conductor		N/A
1.7 (4.7.3)	Terminals for supply conductors		P
1.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
1.7 (4.7.4)	Terminals other than supply connection		N/A
1.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
1.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.7 (4.8)</b>	<b>Switches</b>		<b>N/A</b>
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
<b>1.7 (4.9)</b>	<b>Insulating lining and sleeves</b>		<b>P</b>
1.7 (4.9.1)	Retainment		P
	Method of fixing ..... : heat-shrinkable tube		P
1.7 (4.9.2)	Insulated linings and sleeves:		P
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C) ..... :		N/A
<b>1.7 (4.10)</b>	<b>Double or reinforced insulation</b>		<b>P</b>
1.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		P
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
1.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
1.7 (4.10.3)	Retainment of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		P
	- lining in lamp holder		N/A
1.7 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
<b>1.7 (4.11)</b>	<b>Electrical connections and current-carrying parts</b>		<b>P</b>

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.11.1)	Contact pressure		P
1.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
1.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
1.7 (4.11.4)	Material of current-carrying parts		P
1.7 (4.11.5)	No contact to wood or mounting surface		P
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
<b>1.7 (4.12)</b>	<b>Screws and connections (mechanical) and glands</b>		<b>P</b>
1.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		P
	Torque test: torque (Nm); part..... :	Screw fixed cord anchorage (Terminal box output side and Terminal box): 0,8 Nm	P
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
1.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
1.7 (4.12.4)	Locked connections:		P
	- fixed arms; torque (Nm) ..... :	The connection between E27 lampholder and metal tube: 2,5 Nm;	P
	- lamp holder; torque (Nm) ..... :	E27: 2,0 Nm	P
	- push-button switches; torque 0,8 Nm ..... :		N/A
1.7 (4.12.5)	Screwed glands; force (Nm)..... :		N/A
<b>1.7 (4.13)</b>	<b>Mechanical strength</b>		<b>P</b>
1.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm) ..... :		N/A
	- other parts; energy (Nm)..... :	Enclosure: 0,35 Nm	P
	1) live parts		P
	2) linings		P
	3) protection		P
	4) covers		P
1.7 (4.13.2)	Metal parts have adequate mechanical strength		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.13.3)	Straight test finger		P
1.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
1.7 (4.13.6)	Tumbling barrel		N/A
<b>1.7 (4.14)</b>	<b>Suspensions, fixings and means of adjusting</b>		<b>P</b>
1.7 (4.14.1)	Mechanical load:		P
	A) four times the weight	Max. 0,76 kg x 4 (With LED lamp)	P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm) .....		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm) .....		N/A
	Metal rod. diameter (mm) .....		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
1.7 (4.14.2)	Load to flexible cables		P
	Mass (kg) .....	0,76	—
	Stress in conductors (N/mm <sup>2</sup> ) .....	5,016	P
	Mass (kg) of semi-luminaire .....		N/A
	Bending moment (Nm) of semi-luminaire .....		N/A
1.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....		N/A
	- strands broken .....		N/A
	- electric strength test afterwards		N/A
1.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
1.7 (4.14.5)	Guide pulleys		N/A
1.7 (4.14.6)	Strain on socket-outlets		N/A
<b>1.7 (4.15)</b>	<b>Flammable materials</b>		<b>P</b>
	- glow-wire test 650°C .....	See Test Table 1.15 (13.3.2)	P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- spacing $\geq 30$ mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
1.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
<b>1.7 (4.16)</b>	<b>Luminaires for mounting on normally flammable surfaces</b>		<b>P</b>
	No lamp control gear ..... :	(compliance with Section 12)	P
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
1.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
1.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
1.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
<b>1.7 (4.17)</b>	<b>Drain holes</b>		<b>N/A</b>
	Clearance at least 5 mm		N/A
<b>1.7 (4.18)</b>	<b>Resistance to corrosion</b>		<b>P</b>
1.7 (4.18.1)	- rust-resistance		N/A
1.7 (4.18.2)	- season cracking in copper		P
1.7 (4.18.3)	- corrosion of aluminium		N/A
1.7 (4.19)	Ignitors compatible with ballast		N/A
1.7 (4.20)	Rough service vibration		N/A
<b>1.7 (4.21)</b>	<b>Protective shield</b>		<b>N/A</b>
1.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Shield of glass if tungsten halogen lamps		N/A
1.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
1.7 (4.21.3)	No direct path		N/A
1.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment .....	See Test Table 1.15 (13.3.2)	N/A
1.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
1.7 (4.23)	Semi-luminaires comply Class II		N/A
<b>1.7 (4.24)</b>	<b>Photobiological hazards</b>		<b>N/A</b>
1.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
1.7 (4.24.2)	Retinal blue light hazard		N/A
	Class of risk group assessed according to IEC/TR 62778 .....		—
	Luminaires with $E_{thr}$ :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 .. :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
<b>1.7 (4.25)</b>	<b>Mechanical hazard</b>		<b>P</b>
	No sharp point or edges		P
<b>1.7 (4.26)</b>	<b>Short-circuit protection</b>		<b>N/A</b>
1.7 (4.26.1)	Adequate means of uninsulated accessible SELV / PELV parts		N/A
1.7 (4.26.2)	Short-circuit test with test chain according 4.26.3:		N/A
	Supply source ES1 PSE		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
<b>1.7 (4.27)</b>	<b>Terminal blocks with integrated screwless protective earthing contacts</b>		<b>N/A</b>
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After test, resistance < 0,05 $\Omega$		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 $\Omega$		N/A
	Voltage drop test, resistance < 0,05 $\Omega$		N/A
<b>1.7 (4.28)</b>	<b>Fixing of thermal sensing control</b>		<b>N/A</b>
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material ( $^{\circ}\text{C}$ ) ..... :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
<b>1.7 (4.29)</b>	<b>Luminaires with non-replaceable light source</b>		<b>N/A</b>
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
<b>1.7 (4.30)</b>	<b>Luminaires with non-user replaceable light source</b>		<b>N/A</b>
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	At least one fixing means requiring use of tool		N/A
<b>1.7 (4.31)</b>	<b>Insulation between circuits</b>		<b>N/A</b>
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
<b>1.7 (4.31.1)</b>	<b>SELV or PELV circuits</b>		<b>N/A</b>
	Used SELV/PELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of SELV/PELV circuits from LV supply		N/A
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		N/A
	Insulating of SELV/PELV circuits from FELV		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets have protective conductor contact		N/A
1.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
<b>1.7 (4.32)</b>	<b>Overvoltage protective devices</b>		<b>N/A</b>
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- only connected to protective earth		N/A
<b>1.7 (4.33)</b>	<b>Luminaire powered via information technology communication cabling</b>		<b>N/A</b>
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
<b>1.7 (4.34)</b>	<b>Electromagnetic fields (EMF)</b>		<b>P</b>
	No harmful electromagnetic fields		P
<b>1.7 (4.35)</b>	<b>Protection against moving fan blades</b>		<b>N/A</b>
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius $\geq 0.5$ mm and:		N/A
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan $\leq 2$ W at rated voltage		N/A
<b>1.7 (4.36)</b>	<b>Track-mounted luminaires</b>		<b>N/A</b>
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A

<b>1.8 (11)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		
1.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
1.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 1.8 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $\hat{U}_{OUT}$ and $f_{UOUT}$ according IEC 61347-1, clause 7.1, item w	See Test Table 1.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.8 (11.2) II	N/A
1.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 1.8 (11.2) I	P
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $U_P$	See Test Table 1.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.8 (11.2) II	N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.9 (7)</b>	<b>PROVISION FOR EARTHING</b>		
1.9 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance < 0,5 $\Omega$ ..... :		N/A
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		N/A
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
1.9 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		N/A
1.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
1.9 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
1.9 (7.2.6)	Protective earth terminal adjacent to mains terminals		N/A
1.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		N/A
1.9 (7.2.8)	Material of protective earth terminal		N/A
	Contact surface bare metal		N/A
1.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
1.9 (7.2.11)	Protective earthing core coloured green-yellow		N/A
	Length of protective earthing conductor		N/A
1.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

<b>1.10 (14)</b>	<b>SCREW TERMINALS</b>		
	Separately approved; component list	(see Annex 1)	P
	Part of the luminaire	(see Annex 3)	N/A
<b>1.10 (15)</b>	<b>SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS</b>		
	Separately approved; component list..... :	(see Annex 1)	N/A
	Part of the luminaire ..... :	(see Annex 4)	N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.11 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		
<b>1.11 (5.2)</b>	<b>Supply connection and external wiring</b>		<b>P</b>
1.11 (5.2.1)	Means of connection ..... : Terminal block		P
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
1.11 (5.2.2)	Type of cable ..... :		N/A
	Nominal cross-sectional area (mm²) ..... :		N/A
	Cables equal to IEC 60227 or IEC 60245		N/A
1.11 (5.2.3)	Type of attachment, X, Y or Z		N/A
1.11 (5.2.5)	Type Z not connected to screws		N/A
1.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
1.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
1.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
1.11 (5.2.9)	Locking of screwed bushings		N/A
1.11 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
1.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
1.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	Complying with type Y's test	P
1.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N) ..... :	60 N	P
	- torque test: torque (Nm) ..... :	0,25 Nm (Revised on 2024-06-20)	P
	- displacement $\leq 2$ mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
1.11 (5.2.10.4)	Luminaire with/designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV $\leq 25$ V RMS/60V DC		N/A
	- Ordinary Class III luminaire supplied with PELV $\leq 12$ V RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage $\leq 12$ V RMS/30V DC		N/A
	Pull test of 30N		N/A
1.11 (5.2.11)	External wiring passing into luminaire		P
1.11 (5.2.12)	Looping-in terminals		N/A
1.11 (5.2.13)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
1.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
1.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A
1.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
1.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
<b>1.11 (5.3)</b>	<b>Internal wiring</b>		<b>P</b>
1.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A) .....		N/A
	- temperatures ..... : (see Annex 2)		N/A
	Green-yellow for protective earth only		N/A
1.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm <sup>2</sup> )..... : See Annex 1		P
	Insulation thickness (mm) ..... : See Annex 1		P
	Extra insulation added where necessary		N/A
1.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Cross-sectional area (mm <sup>2</sup> )..... :		N/A
1.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
1.11 (5.3.1.4)	Conductors without insulation		N/A
1.11 (5.3.1.5)	SELV/PELV current-carrying parts		N/A
1.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
1.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
1.11 (5.3.3)	Insulating bushings:		P
	- suitable fixed		P
	- material in bushings		P
	- material not likely to deteriorate		P
	- cables with protective sheath		P
1.11 (5.3.4)	Joints and junctions effectively insulated		N/A
1.11 (5.3.5)	Strain on internal wiring		P
1.11 (5.3.6)	Wire carriers		N/A
1.11 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
<b>1.11 (5.4)</b>	<b>Test to determine suitability of conductors having a reduced cross-sectional area</b>		<b>N/A</b>
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A

<b>1.12 (8)</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		
1.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		P
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high-pressure discharge lamp		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
1.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
1.12 (8.2.3.a)	Class II luminaire:		P
	- basic insulated metal parts not accessible		P
	- required insulation from live parts in compliance with Table X.1		P
	- glass protective shields not used as supplementary insulation		N/A
1.12 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
1.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	- interrupted DC voltage (V) .....:		N/A
	- touch current if applicable (mA) ..... :		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	- interrupted DC voltage (V) .....:		N/A
	Class III luminaire only for connection to SELV/PELV		N/A
1.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	One pole insulated if required		N/A
1.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.12 (8.2.6)	Covers reliably secured		P
1.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 $\mu$ F not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 $\mu$ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 $\mu$ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A

<b>1.13 (12)</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		
1.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 1.14		—
<b>1.13 (12.2)</b>	<b>Selection of lamps and ballasts</b>		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Control gear if separate and not supplied	(Control gear used see Annex 2)	—
<b>1.13 (12.3)</b>	<b>Endurance test</b>		<b>P</b>
	a) mounting-position .....	Ceiling mounted	—
	b) test temperature (°C) .....	55	—
	c) total duration (h) .....	240	—
	d) supply voltage (V) .....	253 Vac	—
	d) if not equipped with control gear, constant voltage/current (V) or (A) .....	--	—
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		—
	- voltage under abnormal operation (V).....		—
	e) luminaire ceases to operate		—
	f) luminaire with constant light output function		N/A
1.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- no cracks, deformation etc.		P
<b>1.13 (12.4)</b>	<b>Thermal test (normal operation)</b>	(see Annex 2)	<b>P</b>
<b>1.13 (12.5)</b>	<b>Thermal test (abnormal operation)</b>	(see Annex 2)	<b>N/A</b>
<b>1.13 (12.6)</b>	<b>Thermal test (failed lamp control gear condition):</b>		<b>N/A</b>
1.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A) .....		—
	- case of abnormal conditions .....		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un .....		—
	- measured mounting surface temperature (°C) at 1,1 Un .....		N/A
	- calculated mounting surface temperature (°C) .....		N/A
	- track-mounted luminaires		N/A
1.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions .....		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C) .....		N/A
	- track-mounted luminaires		N/A
<b>1.13 (12.7)</b>	<b>Thermal test (failed lamp control gear in plastic luminaires):</b>		<b>N/A</b>
1.13 (12.7.1)	Luminaire without temperature sensing control		N/A
1.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W .....		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions .....		—
	- Ballast failure at supply voltage (V) .....		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions .....		—
	- measured winding temperature (°C): at 1,1 Un .....		—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un .....		—
	- calculated temperature of fixing point/exposed part (°C) .....		—
	Ball-pressure test .....	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions .....		—
	- measured winding temperature (°C): at 1,1 Un .....		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un .....		—
	- calculated temperature of fixing point/exposed part (°C) .....		—
	Ball-pressure test .....	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions .....		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
1.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link .....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out .....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- auto reset cut-out .....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions .....		—
	- highest measured temperature of fixing point/exposed part (°C): .....		—
	Ball-pressure test: .....	See Test Table 1.15 (13.2.1)	N/A

<b>1.14 (9)</b>	<b>RESISTANCE TO DUST AND MOISTURE</b>		
1.14 (-)	If IP > IP 20 the order of tests as specified in clause 1.12		P
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP .....	IP44	—
	- mounting position during test .....	Ceiling mounted	—
	- fixing screws tightened; torque (Nm) .....	--	—
	- tests according to clauses .....	9.2.0	—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		P
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		P
	g) no damage of protective shield or glass envelope		N/A
1.14 (9.3)	Humidity test 48 h		P

<b>1.15 (10)</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		
1.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø .....		—
	Insulation resistance (MΩ):		P
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface..... :		N/A
	- between current-carrying parts and metal parts of the luminaire .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 .....		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity .....	> 100 MΩ	P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- between live parts and mounting surface .....	> 100 MΩ	P
	- between live parts and metal parts .....	> 100 MΩ	P
	- between live parts of different polarity through action of a switch .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....		N/A
	- Insulation bushings as described in Section 5 .....		N/A
1.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		P
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface .....		N/A
	- between current-carrying parts and metal parts of the luminaire .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....		N/A
	- Insulation bushings as described in Section 5 .....		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity .....	1460 V	P
	- between live parts and mounting surface .....	2920 V	P
	- between live parts and metal parts .....	2920 V	P
	- between live parts of different polarity through action of a switch .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....		N/A
	- Insulation bushings as described in Section 5 .....		N/A
1.15 (10.3)	Touch current (mA).....	Max. 0,009 mA	P
	Protective conductor current (mA).....		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.16 (13)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		
1.16 (13.2.1)	Ball-pressure test .....	See Test Table 1.16 (13.2.1)	N/A
1.16 (13.3.1)	Needle-flame test (10 s) .....	See Test Table 1.16 (13.3.1)	N/A
1.16 (13.3.2)	Glow-wire test (650°C) .....	See Test Table 1.16 (13.3.2)	N/A
1.16 (13.4)	Proof tracking test (IEC 60112) .....	See Test Table 1.16 (13.4)	N/A

IEC 60598-2-1							
Clause	Requirement + Test				Result - Remark		Verdict
1.8 (11.2)	TABLE I: Creepage distances and clearances						P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						P
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	3,0	1,5	11.1.B	3,0	2,5	11.1.A
Working voltage (V) .....					230 Vac		—
PTI .....					< 600 ☒      ≥ 600 ☐		—
Pulse voltage or $U_P$ if applicable (kV) .....					--		—
Supplementary information: - Current-carrying parts of different polarity							
Distance 2:	R	6,0	3,0	Table 11.1.B	6,0	5,0	Table 11.1.B
Working voltage (V) .....					230 Vac		—
PTI .....					< 600 ☒      ≥ 600 ☐		—
Pulse voltage or $U_P$ if applicable (kV) .....					--		—
Supplementary information: - Current-carrying parts and accessible parts - Current-carrying parts and supporting surface							
Distance 3:	S	6,0	1,5	Table 11.1.B	6,0	2,5	Table 11.1.B
Working voltage (V) .....					230 Vac		—
PTI .....					< 600 ☒      ≥ 600 ☐		—
Pulse voltage or $U_P$ if applicable (kV) .....					--		—
Supplementary information: - Parts becoming live due to breakdown of basic insulation and metal parts							

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

IEC 60598-2-1							
Clause	Requirement + Test				Result - Remark		Verdict
<b>1.8 (11.2)</b>	<b>TABLE II: Creepage distances and clearances</b>						<b>N/A</b>
<b>Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages</b>							
<b>Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2</b>							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V) .....							—
Frequency if applicable (kHz) .....							—
PTI .....					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....							—
Supplementary information:							
Distance 2:							
Working voltage (V) .....							—
Frequency if applicable (kHz) .....							—
PTI .....					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....							—
Supplementary information:							
Distance 3:							
Working voltage (V) .....							—
Frequency if applicable (kHz) .....							—
PTI .....					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....							—
Supplementary information:							

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced.

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.16 (13.2.1)</b>	<b>TABLE: Ball Pressure Test of Thermoplastics</b>		<b>N/A</b>
<b>Allowed impression diameter (mm) .....</b>		<b>2</b>	<b>—</b>
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)
Supplementary information:			

<b>1.16 (13.3.1)</b>	<b>TABLE: Needle-flame test</b>				<b>N/A</b>
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

<b>1.16 (13.3.2)</b>	<b>TABLE: Resistance to heat and fire - Glow wire tests</b>				<b>N/A</b>
Object/ Part No./ Material	Manufacturer/ trademark	GWT (°C) : 650			Verdict
		t <sub>E</sub> (s)	t <sub>I</sub> (s)	t <sub>R</sub> (s)	
Ignition of the specified layer placed underneath the test specimen (Yes/No)..... :					
Supplementary information:					

<b>1.16 (13.4)</b>	<b>TABLE: Proof tracking test</b>				<b>N/A</b>
<b>Test voltage PTI .....</b>		<b>175 V</b>			<b>—</b>
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Supplementary information:					



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1		TABLE: Critical components information					
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
Lampholder (E27)	B	LOGO	E27-LA1A	250 Vac, 4 A, 180 °C	EN IEC 60238:2018	ENEC NO5079	
Terminal Block + Box	C	Guangdong OJun Technology Co., Ltd.	OJ-3618	250 Vac, 17,5 A, IP54, T100, 1,5 mm <sup>2</sup>	IEC 60598-2-1:2020, EN 60998-1:2004, EN 60998-2-1:2004	Test in appliance and ENEC 35-111890	
Cable	A	Zhongshancity Defang Wire & Cable Co., Ltd. (Revised on 2024-06-20)	H05RN-F (Revised on 2024-06-20)	2 x 1,0 mm <sup>2</sup> , 300 Vac, 90 °C (Revised on 2024-06-20)	EN 50525-2-21:2011	VDE 40049745 (Revised on 2024-06-20)	
Heat shrink tubing	C	Dongguan Salipt Co., Ltd.	SALIPT S-901-600	600 V, 125 °C, VW-1	IEC 60598-2-1:2020	Test in appliance and UL E209436	
Supplementary information:							
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.							
The codes above have the following meaning:							
A - The component is replaceable with another one, also certified, with equivalent characteristics							
B - The component is replaceable if authorised by the test house							
C - Integrated component tested together with the appliance							
D - Alternative component							

IEC 60598-2-1								
Clause	Requirement + Test				Result - Remark		Verdict	
ANNEX 2	TABLE: Thermal tests of Section 12							
	Type reference .....				TLP-9001-40-01		—	
	Lamp used.....				E27, 1x10 W LED lamp		—	
	Lamp control gear used .....				—		—	
	Mounting position of luminaire .....				Mounted under ceiling board		—	
	Supply wattage (W) .....				10,807 W		—	
	Supply current (A) .....				0,064 A		—	
	Temperatures in test 1 - 4 below are corrected for ta (°C) .....				45		—	
	- abnormal operating mode .....				—		—	
1.13 (12.4)	- test 1: rated voltage .....				1,06 x 230 = 243,8 Vac		—	
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current .....				--		—	
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage .....				—		—	
	Through wiring or looping-in wiring loaded by a current of A during the test .....				—		—	
1.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage .....				—		—	
Temperature measurements (°C)								
Part		Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
			test 1	test 2	test 3	limit	test 4	limit
Test piece clamped by cord anchorage		45	46,2	—	—	90	—	—
Terminal output wire clamped by cord anchorage		45	46,9	—	—	90	—	—
E27 Lamp holder contact		45	74,3	—	—	180	—	—
Lamp holder wire		45	51,6	—	—	180	—	—
Mounting surface		45	46,3	—	—	90	—	—
Lighted object (0,1 m)		45	50,0	—	—	90	—	—
Supplementary information: —								

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ANNEX 3</b>	<b>Screw terminals (part of the luminaire)</b>	
<b>(14)</b>	<b>SCREW TERMINALS</b>	N/A

<b>ANNEX 4</b>	<b>Screwless terminals (part of the luminaire)</b>	
<b>(15)</b>	<b>SCREWLESS TERMINALS</b>	N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ATTACHMENT 1: TO TEST REPORT IEC 60598-2-1</b> <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> Luminaires Part 2: Particular requirements Section 1: Fixed general purpose luminaires			
<b>Differences according to.....:</b>		EN IEC 60598-2-1: 2021 used in conjunction with EN IEC 60598-1: 2021 + A11: 2022	

	<b>CENELEC COMMON MODIFICATIONS (EN)</b>		
<b>1.7 (4)</b>	<b>CONSTRUCTION</b>		
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
<b>1.10 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		
1.10 (5.2.2)	Cables equal to EN 50525		N/A
	Replace table 5.1 – Supply cord		N/A
<b>1.12 (12)</b>	<b>ENDURANCE TESTS AND THERMAL TESTS</b>		
1.12 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring		N/A

<b>ZB</b>	<b>ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)</b>		
(3.3)	DK: power supply cords of class I luminaires with label		N/A
(4.5.1)	DK: socket-outlets		N/A
(5.2.1)	CY, DK, FI, GB: type of plug		N/A

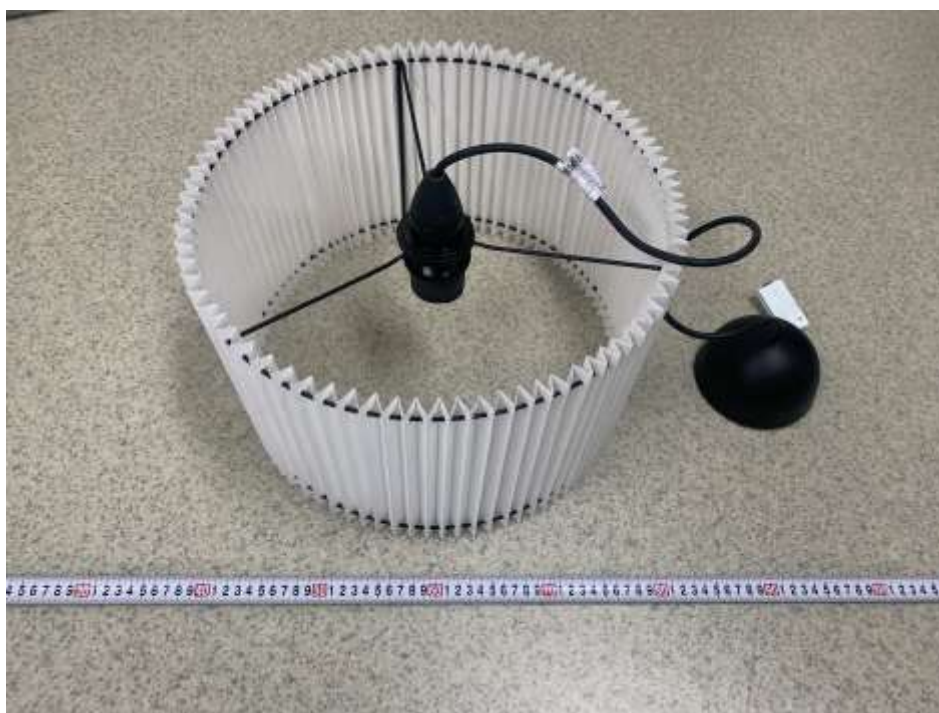
<b>ZC</b>	<b>ANNEX ZC, NATIONAL DEVIATIONS (EN)</b>		
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N/A
	FR: Safety requirements for high buildings  (Arrêté du 30 décembre 2011 portant règlement de sécurité pour la construction des immeubles de grande hauteur et leur protection contre les risques d'incendie et de panique; Section VIII; Article GH 48, Eclairage)  Glow-wire test for outer parts of luminaires:		N/A
	- 850°C for luminaires in stairways and horizontal travel paths		N/A
	- 650°C for indoor luminaires		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
(13.3)	GB: Requirements according to United Kingdom Building Regulation		N/A

IEC 60598-2-1

**Attachment 2: Product photos**

Overall view for TLP-9001-40-02



Overall view for TLP-9001-40-01

IEC 60598-2-1

**Attachment 2: Product photos**

Overall view for TLP-9001-40-01



Input terminal box view

IEC 60598-2-1
---------------

<b>Attachment 2: Product photos</b>
-------------------------------------



Input terminal box internal view



Cord anchorage view inside the canopy



IEC 60598-2-1

**Attachment 2: Product photos**

Cord anchorage view near the lampholder



Lampholder internal view

IEC 60598-2-1

**Attachment 2: Product photos**

Lampholder internal view (Revised on 2024-06-20)

--- END ---